Rec'd PCT/PTO 1 8 APR 2005

10/531706

Dispersion, coating slip and absorptive medium

The invention provides an aqueous dispersion containing a
silicon dioxide powder and another metal oxide or non-metal
oxide powder. The invention also provides a coating slip
5   deriving from this dispersion and an ink-absorptive medium.

Surfaces of absorptive supports can be coated with coating
slips to improve their print properties. Of particular
importance are for example the adsorption, drying times and
adhesion of the ink as well as the gloss of the absorptive
10   medium. Particularly for photograph-type materials gloss
and high ink absorption capacity represent substantial
features.

The coating slip for producing a glossy absorptive support
generally comprises an aqueous dispersion of pigments, such
15   as hydrated aluminium hydroxide, aluminium oxide, silicon
dioxide (silica), titanium dioxide and a binder, such as
e.g. polyvinyl alcohol, the pigments being incorporated in
the form of powders or as a dispersion of powders.

High-gloss coatings can be obtained for example with fine
20   silica particles. The often low stability and the high
viscosity of the dispersions used for the coating slips are
disadvantageous. Thus the dispersion often has to be
produced immediately before its conversion into a coating
slip. More highly filled dispersions are difficult to
25   process because of the increased viscosity.

The filler content of the coating slip is an important
parameter for the quality of the absorptive medium produced
with it and for the economic efficiency of the process. If
a coating slip has a high filler content less coating slip
30   is needed to obtain a specific rate of application than is
the case with coating slips having a low filler content. In
addition, less water has to be evaporated in the case of a
high filler content, which means that drying is faster. The

process can therefore be performed more economically as
compared with a coating slip having a low filler content.

A high gloss and a good ink absorption capacity can also be
achieved by processing means if the coating slip is applied
5   by cast coating. This process is relatively slow and cost-
intensive, however.

In DE-A-100 35 054 cationised fine silica particles with a
primary particle diameter of 50 nm or less are used in an
aqueous dispersion to produce a coating slip that leads to
10   an absorptive medium with high gloss and good ink
absorption capacity.

US 6,284,819 describes a coating slip with a specific
viscosity that is obtained from an aqueous dispersion of
two particles differing in type and size. The first powder
15   type comprises metal oxide particles such as e.g. silica,
cationised silica or aluminium oxide. The first powder type
comprises aggregates of smaller primary particles having an
average primary particle size of less than 100 nm and an
average aggregate size of 100 to 500 nm. In addition, the
20   average aggregate diameter of the particles of the second
powder type is at least half the size of the average
aggregate diameter of the first powder type. The second
powder type comprises metal oxides and synthetic polymers.
The ratio by weight of the particles of the first to the
25   second powder type is between 9 and 91 wt.%. An absorptive
medium with high gloss and good ink absorption capacity can
be produced with the coating slip thus defined. The first
powder type of particles is intended to be responsible for
the absorption of liquid. The smaller aggregates of the
30   second powder type are intended to fill voids. Overall the
packing density of the coating is increased. The
substantial feature is that the average aggregate diameter
of the particles of the second powder type is at least half
the size of the average aggregate diameter of the first
35   powder type. As is shown in the embodiment examples, the

coating slip is obtained by adding a binder, such as e.g. polyvinyl alcohol, to a physical mixture of two aqueous dispersions, one dispersion containing the particles of the first powder type, one dispersion containing the particles

5   of the second powder type. All combinations of metal oxide particles, regardless of their specific surface charge, at a given pH of the dispersion are disclosed in US 6,284,819. This can lead to dispersions that are not stable, that rapidly tend to gel and that are therefore only of limited

10   suitability for producing a coating slip.

The examples show that there is a high level of interest in coating slips and in absorptive media produced with them having high gloss, good ink absorption capacity and rapid drying times. Particular importance is given to the

15   dispersions that serve as the starting material for the coating slips.

The object of the invention is therefore to provide a dispersion having a high filler content and low viscosity that allows a coating slip to be produced that, when

20   applied to an absorptive support, produces an absorptive medium displaying high gloss, good ink absorption capacity and good drying performance.

The invention provides a stable, aqueous dispersion
containing powders A and B,

- wherein powder A is an amorphous silicon dioxide
  powder having an average particle diameter of 0.05 to
  0.7 μm and a BET surface area of 5 to 50 m^2/g, and
- wherein powder B is a metal oxide or non-metal oxide
  powder consisting of aggregates of intergrown primary
  particles and displays a primary particle size of 5 to
  50 nm and a BET surface area of 50 to 400 m^2/g, and
- wherein at a given pH of the dispersion, powders A and
  B display the same surface charge sign, and wherein
  powders A and B have a zeta potential that gives rise
  to an electrostatic repulsion between the particles
  that is greater than the van der Waals attraction
  between the powders, and wherein in the dispersion the
  average particle diameter of the group A powder is 60
  to 166 % of the aggregates of the group B powder and
- wherein the proportion of powder A, relative to the
  sum of powders A and B, is at least 5 wt.%.

The primary particles of these powders are understood to be
the smallest particles in high-resolution TEM images, which
are obviously unable to be broken down any further. Several
primary particles can congregate at their points of contact
to form aggregates. These aggregates are either impossible
or very difficult to break down again using dispersing
devices. Several aggregates can join together loosely to
form agglomerates, a process that can be reversed again by
suitable dispersion.

Average aggregate diameter is understood to refer to the
equivalent sphere diameter, stated as the volume-weighted
median value from peak analysis. For the powders used in
the dispersion it is calculated by dynamic light
scattering, for example with a Malvern Zetasizer 3000 HSa

device. If the differences in aggregate diameters of
powders A and B in a dispersion are between 60 and 166%, a
monomodal distribution is measured with this method. This
means that the average aggregate diameters of powders A and
5   B are measured as being of the same size if their diameters
differ by between 60% and 166%. If the average aggregate
diameters of two powders in a dispersion differ by more
than 60% or by more than 166%, when measured separately,
then the light scattering displays a bimodal distribution
10   of the powder mixture. This distribution lies outside the
claimed range.

Stable is understood to mean that over a period of at least
one month the dispersion does not settle out and forms no
bottom products. This also means that the dispersion can be
15   transported and does not have to be produced immediately
before use.

Aqueous is understood to mean that the main component of
the liquid phase is water.

In order to obtain a stable dispersion it is important that
20   the particles present in the dispersion display the same
surface charge sign. Particles having the same surface
charge sign will repel one another. If the zeta potential
is sufficiently high, the repulsive force can overcome the
van der Waals attraction between the powder particles and
25   coagulation or sedimentation of the particles is avoided.
The zeta potential is a measure of the surface charge of
the particles. It is the potential at the shear level
within the electrochemical double layer of metal oxide
and/or non-metal oxide particles and electrolyte in the
30   dispersion. The zeta potential depends inter alia on the
type of particle, for example silicon dioxide, cationised
silicon dioxide or aluminium oxide. An important parameter
in connection with the zeta potential is the isoelectric
point (IEP) for a particle. The IEP indicates the pH at
35   which the zeta potential is zero. In aluminium oxide or

cationised silicon dioxide the IEP is at a pH of
approximately 9 to 10, in silicon dioxide it is below pH
3.8.

The charge density at the surface can be influenced by
5   changing the concentration of the potential-determining
ions in the surrounding electrolyte. In those dispersions
in which the particles carry acid or basic sites at the
surface, the charge can be changed by adjusting the pH. The
greater the difference between pH and IEP, the more stable
10 the dispersion.

The zeta potential can be determined for example by
measuring the colloid vibration current (CVI) of the
dispersion or by determining the electrophoretic mobility.

In a preferred embodiment the average primary particle
15 diameters of powders A and B can differ by a factor of at
least 2, in a particular embodiment by a factor of at least
2.5.

In a particular embodiment the average aggregate diameter
of powder B can be 80 to 125% of the size of powder A or
20 vice versa. The aggregate diameter of powders A and B is
particularly preferably of an approximately equal size.

The total solids content of the dispersion can be varied
over broad limits. The solids content of powders A and B in
the dispersion according to the invention can
25 advantageously be between 20 and 80 wt.%.

In an advantageous embodiment the viscosity of the
dispersion according to the invention can be below a value
of 1500 mPas at a shear rate of 12 s^{-1} and a temperature of
23°C. Values of below 1000 mPas at a shear rate of 12 s^{-1}
30 and a temperature of 23°C can be particularly preferred.

There is no restriction on the origin of the silicon
dioxide of powder A. Thus ground silica gels, for example

those sold by Grace under the name Sylojet® or Syloid®, can be used.

Pyrogenically produced silicon dioxide powder can preferably be used, however.

5   Pyrogenically within the meaning of the invention is understood to mean the oxidation of silicon, as described for example in CA2166844. Silicon dioxide powder of this type is sold for example by Elkem under the name Microsilica®.

10   Pyrogenically within the meaning of the invention is also understood to mean the hydrolysis of silicon and aluminium compounds or silicon and titanium compounds in the gas phase in a flame generated by the reaction of hydrogen and oxygen. The pyrogenically produced silicon dioxide of

15   powder A can particularly preferably display a BET surface area of 5 to 30 m^2/g and a dispersion coefficient Z of less than 40, whereby $Z = Y/2X$, where X = median value of the particle size distribution, Y = range of the particle size distribution, relative to 10 to 90 % of the cumulative

20   particle size. Powder A is produced as described in the Japanese laid-open specification JP2002-003213 of 09 January 2002. The powders described therein display particles having an almost perfectly spherical shape. Figure 1 shows the frequency of particles sizes (in %) of a

25   powder having a specific surface area of 10 m^2/g (I) and 30 m^2/g (II) as a function of the particle size (in μm).

The average aggregate size of powder B can preferably assume values of between 50 and 500 nm.

Powder B of the invention comprises the metal and/or non-

30   metal oxide powders silicon dioxide, aluminium oxide, titanium dioxide, cerium oxide and zirconium oxide. The surfaces of these powders display acid or basic sites. There is no restriction on the origin of the metal and non-

metal oxides. Pyrogenically produced metal and non-metal
oxides can preferably be used for the dispersion according
to the invention. Pyrogenically produced silicon dioxide
and aluminium oxide are particularly preferred. The BET
5   surface area of the powders is between 5 and 600 m^2/g.

In an advantageous further development of the invention,
powder B can be a mixed oxide powder. Powders of at least
two oxides from the group comprising silicon dioxide,
aluminium oxide, titanium dioxide, cerium oxide or
10   zirconium oxide can be used as mixed oxide powders.

Mixed oxide is understood to mean the intimate mixture of
oxide powders at an atomic level to form mixed oxygen-
metal/non-metal bonds, such as e.g. Si-O-Al or Si-O-Ti. In
addition, the primary particles can also display regions in
15   which the oxide powders are present side by side, for
example regions of silicon dioxide adjacent to aluminium
oxide.

Pyrogenically produced mixed oxide powders can preferably
be used. Here the precursors of mixed oxides, separately or
20   together, are transferred to a burner and burnt in a flame
and the resulting mixed oxide powders separated off. The
production of these powders is described for example in EP-
A-585 544, DE-A-199 19 635 (both SiO_2-Al_2O_3 mixed oxides) or
DE-A-4235996 (SiO_2-TiO_2 mixed oxide).

25   The invention also comprises doped metal or non-metal
oxides produced by the method described in DE-A-196 50 500.
In particular the silicon-aluminium mixed oxide described
in DE-A-198 47 161.

The invention also comprises powders having a metal or non-
30   metal oxide as core, which is entirely or partially
sheathed by a different metal or non-metal oxide. The
sheath can be applied in a liquid medium or by means of a

deposition process from a vaporous precursor of the metal
or non-metal oxide.

Powders A and B can also be used in cationised form. This
can be achieved by treating the powder with a cationic
5   polymer that is soluble in the dispersion medium. A polymer
having a weight-average molecular weight of below
100,000 g/mol can preferably be used. The range between
2000 and 50,000 g/mol is particularly preferred.

Cationic polymers can be polymers having at least one
10   quaternary ammonium group, phosphonium group, an acid
adduct of a primary, secondary or tertiary amine group,
polyethylene imines, polydiallyl amines or polyallyl
amines, polyvinyl amines, dicyandiamide condensates,
dicyandiamide-polyamine co-condensates or polyamide-
15   formaldehyde condensates.

Those deriving from a diallyl ammonium compound can be
preferable, particularly preferably those deriving from a
dialkyl diallyl compound, which can be obtained by a
radical cyclisation reaction of diallyl amine compounds and
20   display the structure 1 or 2. Structures 3 and 4 represent
copolymers deriving from dialkyl diallyl compounds.

R_1 and R_2 represent a hydrogen atom, an alkyl group having 1
to 4 C atoms, methyl, an ethyl, an n-propyl, an iso-propyl,
an n-butyl, an iso-butyl or a tert.-butyl group, wherein R_1
25   and R_2 can be the same or different. A hydrogen atom from
the alkyl group can also be substituted by a hydroxyl
group. Y represents a radical-polymerisable monomer unit,
such as e.g. sulfonyl, acrylamide, methacrylamide, acrylic
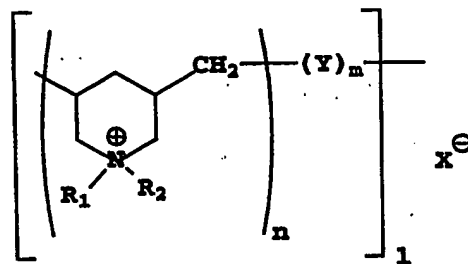acid, methacrylic acid. X^- represents an anion.
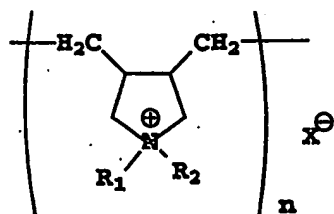
1
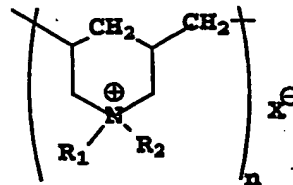
2
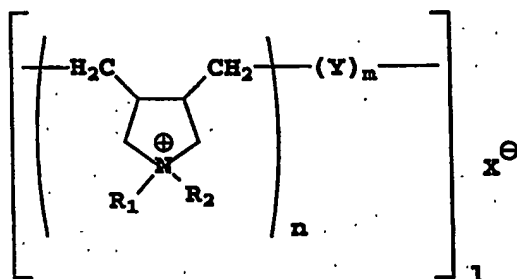
3   4

A poly(diallyl dimethyl ammonium chloride) solution
(PDADMAC solution in water) can be cited by way of example.

The content of cationic polymer can be between 0.1 and 15,
preferably between 0.5 and 10, particularly preferably
between 0.8 and 5 wt.%, relative to the amount of cationic
polymer and powder A and/or B.

The dispersion according to the invention can also contain
substances to adjust the pH, such as acids, bases or buffer
systems, additives to stabilise the dispersion, such as
salts, surface-active substances, organic solvents,
bactericides and/or fungicides.

The invention also provides a process for producing the
dispersion according to the invention, which is
characterised in that powders A and B are dispersed
separately in an aqueous dispersion by means of a
dispersing device and then combined, or that they are first
physically mixed and then dispersed together, or that they
are introduced into the dispersing device in portions and

then dispersed together. A predispersion can optionally
take place prior to dispersion.

High-speed mixers or a toothed disc for example are
suitable for predispersion. Rotor-stator machines, such as
5   Ultra Turrax (IKA) or those manufactured by Ystral, as well
as ball mills and attrition mills, are suitable for
dispersion. Higher energy inputs are possible with a
planetary kneader/mixer. The efficiency of this system
depends on a sufficiently high viscosity of the mixture
10 being processed, however, in order for the high shear
energies needed to break down the particles to be
introduced.

Aqueous dispersions having average aggregate diameters of
below 100 nm can be obtained with high-pressure
15 homogenisers. In these devices two predispersed streams of
suspension under high pressure are decompressed through a
nozzle. The two jets of dispersion hit each other exactly
and the particles grind themselves. In another embodiment
the predispersion is likewise placed under high pressure,
20 but the particles collide against armoured sections of
wall. The operation can be repeated any number of times to
obtain smaller particle sizes.

The invention also provides a coating slip containing the
dispersion according to the invention and at least one
25 hydrophilic binder.

Polyvinyl alcohol, partially or entirely saponified, and
cationised polyvinyl alcohol with a primary, secondary or
tertiary amino group or a tertiary ammonium group on the
main chain or on the side chain can be used as binder.
30 Combinations of these polyvinyl alcohols with one another
and polyvinyl pyrrolidones, polyvinyl acetates, silanised
polyvinyl alcohols, styrene-acrylate latices, styrene-
butadiene latices, melamine resins, ethylene-vinyl acetate
copolymers, polyurethane resins, synthetic resins such as

12

polymethyl methacrylates, polyester resins (for example
unsaturated polyester resins), polyacrylates, modified
starch, casein, gelatine and/or cellulose derivates (for
example carboxymethyl cellulose) can also be used.
5   Polyvinyl alcohol or cationised polyvinyl alcohol can
preferably be used.

The coating slip can also additionally contain one or more
other pigments such as calcium carbonates, phyllosilicates,
aluminium silicates, plastics pigments (for example
10   polystyrene, polyethylene, polypropylene), silicas (for
example colloidal silicas, precipitated silicas, silica
gels, cationised modifications of the cited silica
compounds, aluminium compounds (for example aluminium sols,
colloidal aluminium oxides and hydroxyl compounds thereof,
15   such as pseudoboehmites, boehmites, aluminium hydroxide),
magnesium oxide, zinc oxide, zirconium oxide, magnesium
carbonates, kaolin, clay, talc, calcium sulfate, zinc
carbonate, satin white, lithopones, zeolites.

The coating slip can display a content of powder A and
20   powder B of in total 10 to 60 wt.%. It can preferably be
greater than 15 wt.%, particularly preferably greater than
25 wt.%.

The coating slip can also contain a proportion of binder,
relative to the sum of powders A and B, of between 3 and
25   150 wt.%. It can preferably be between 10 and 40 wt.%,
particularly preferably between 3 and 15 wt.%.

Crosslinking agents such as zirconium oxides, boric acid,
melamine resins, glyoxal and isocyanates and other
molecules which link together the molecule chains of the
30   binder system can be used to increase the water resistance
of the binder system and hence of the coating.

In addition, auxiliary substances such as optical
brighteners, defoaming agents, wetting agents, pH buffers,
UV absorbers and viscosity aids can be used.

The invention also provides the production of the coating
5   slip, which is characterised in that the dispersion
according to the invention is added with stirring to an
aqueous solution of the hydrophilic binder, to which
additional additives can optionally also be added, and
optionally diluted until the desired ratio of powder and
10   binder and the desired total solids content is established.
The addition sequence is not substantial. Stirring is
optionally continued for a defined period of time and
deaeration is then performed in vacuo if required.
Additives are understood to be e.g. pigment, crosslinking
15   agents, optical brighteners, defoaming agents, wetting
agents, pH buffers, UV absorbers and viscosity aids.

The invention also provides an ink-absorptive coating using
the coating slip according to the invention and a support.
Examples of supports that can be used are paper, coated
20   paper, resin films, such as a polyester resin, including
polyethylene terephthalate, polyethylene naphthalate, a
diacetate resin, a triacetate resin, an acrylic resin, a
polycarbonate resin, a polyvinyl chloride, a polyimide
resin, cellophane, celluloid and a glass plate.

25   So-called photographic base papers, i.e. papers to which
one/or more layers of polyethylene film have been applied
to the front and or back, are preferred. Also polyester
film, PVC film or precoated papers.

The absorptive medium according to the invention also
30   includes media in which the ink-absorptive coating consists
of several coating layers of the same type or other layers.
The coating slip according to the invention can be found in
just one or in several layers. Thus for example additional
ink-absorptive coatings, such as films containing

precipitated silica, can also be applied below the coating
slip according to the invention. One or more polymer
layers (for example polyethylene) can also be applied to
the substrate and/or to the coating according to the

5   invention, in order to increase the mechanical stability
and/or the gloss in the coating (e.g. photographic base
paper, lamination).

The supports can be transparent or opaque. There is no
limit to the thickness of the support, but thicknesses of

10 between 50 and 250 μm are preferably used.

The invention also provides the production of an absorptive
medium which is characterised in that the coating slip is
applied to the support and dried. The coating slip can be
applied by all conventional application processes, such as

15 roll coating, blade coating, airbrush, doctor blade
(profiled, smooth, slotted), cast coating, film press, size
press, curtain coating and slot die application (e.g.
casting blade) and combinations thereof. Processes that
allow a very homogeneous coating, such as e.g. cast

20 coating, curtain coating and slot die application, are
preferably used.

The coated substrate can be dried by all conventional
methods, such as air or convection drying (e.g. hot air
passage), contact or conduction drying, energy radiation

25 drying (for example infrared and microwave).

It is surprising that the dispersions according to the
invention display a high filler content with low viscosity
and that the coating slips produced with them display a
high gloss. In US 6,284,819 a coating slip is obtained from

30 an aqueous dispersion containing two powder types of
aggregates, the aggregate diameters of the first powder
type being at least 50 % smaller than those of the second
powder type. The aggregate diameters of the second powder
type are preferably substantially even smaller, for example

below 20 nm. The powder type with the larger aggregate
diameters is intended to be responsible for the absorption
of liquid, the smaller aggregate diameters of the second
powder type are intended to fill voids. Overall the packing
5   density of the coating is increased.

On the other hand, in the dispersion and coating slip
according to the invention the differences in the aggregate
diameters of the individual powder types, in contrast to US
6,284,819, must be no less than 60% of the larger
10   aggregates. It is particularly preferable for the diameter
of the aggregates to be the same.

An explanation of the very good properties of the
dispersion and coating slip according to the invention
cannot be provided at present. Figures 2 and 3 provide a
15   possible interpretation.

Figure 2 shows an arrangement of two aggregates having
primary particles of different sizes in a dispersion. The
aggregates with the lower BET surface area have a diameter
that is half the size of that of the aggregates with the
20   smaller BET surface area. Figure 2 corresponds to the facts
described in US 6,284,819. Figure 2 clearly shows the high
filler content of the dispersion, which has a negative
influence on the pore volume, however, leading to poorer
image properties.

25   Figure 3 shows the situation in the dispersion according to
the invention with two types of aggregates, wherein both
types have the same aggregate size albeit with different
primary particle sizes. Large pores are formed with a high
filler content.

30

Examples

Analytical methods: The viscosity of the dispersions is
determined with an MCR300 device with measuring system CC27
from Parr-Physica, with measurements taken at shear rates
5 of between 0.01 and 100 s^{-1}. The viscosity is given at 1 s^{-1}
and 100 s^{-1} and at 23°C. The viscosity of the coating slips
is measured with a Brookfield RVT rotary viscometer at
100 s^{-1} and 23°C.

The zeta potential is determined with a DT-1200 device from
10 Dispersion Technology Inc. using the CVI method.

The aggregate size is determined by dynamic light
scattering. The Zetasizer 3000 HSa device (Malvern
Instruments, UK) was used. The volume-weighted median value
from peak analysis is given.

15 The average primary particle sizes of the powders used are
determined by transmission electron microscopy (TEM).

Powders: The pyrogenic silicon dioxide powders OX 10 (BET
surface area approx. 10 m^2/g) and OX 30 (BET surface area
approx. 30 m^2/g) from Nippon Aerosil are used as powder A.

20 The pyrogenic oxide powders DOX 110 (SiO_2 mixed oxide
powder with 0.25 wt.% Al), AEROSIL® 200 and AEROSIL® 300
from Degussa AG are used as powder B.

Dispersions: Analytical data for the dispersions is set out
in Table 2.

25 Demineralised water is used as the dispersion medium for
the cited examples. The demineralised water is measured out
and the additive optionally dissolved therein. Powder A and
then powder B are then incorporated successively using a
high-speed mixer. Dispersion is then performed for 30 min

on an Ultra-Turrax at 7000 rpm. After approximately 24 h
the samples are characterised for viscosity, particle size
and zeta potential.

Coating slips

5   **Formulation:** An aqueous polyvinyl alcohol solution (PVA
Mowiol 40-88, Clariant) with a 12.33 % solids content is
placed in a beaker and a quantity of water added such that
after addition of the dispersion D2 a coating slip is
obtained with the desired solids content. The particular
10   dispersion is added to the combination of polyvinyl alcohol
solution and water whilst stirring with a high-speed mixer
disc at 500 revolutions per minute (rpm). Once the addition
is completed stirring is continued for a further 30 minutes
at 500 revolutions per minute. The coating slips are then
15   deaerated with the aid of a desiccator and a water jet
pump.

Coating slip S2-A contains 18 wt.% of dispersion D2,
relative to the solids in the dispersion, and 22 parts of
PVA Mowiol 40-88.

20   Coating slip S2-B contains 20 wt.% of dispersion D2,
relative to the solids in the dispersion, and 6 parts of
PVA Mowiol 40-88.

Index A refers to the coating of films, which is described
below, index B to the coating of paper.

25   Coating slips S0_2-A and S0_2-B are produced in the same
way from dispersion D0_2 according to the prior art.

The composition, viscosities and pH values of the coating
slips are reproduced in Table 3.

18

Ink-absorptive media

The coating slip S2-A is applied with the aid of wet film
spiral blades onto an untreated polyester film (Benn) of
thickness 100 micrometers. Drying is performed with a
5   hairdryer. The rate of application obtained is 25 g/m².

The coated films are printed with an internal test image
using an Epson Stylus Color 980 with the settings Photo
Quality Glossy Film, 1440 dp, Epson calibration, gamma (D):
1.8.

10   Coating slip S2-B is applied with the aid of wet film
spiral blades onto a matt inkjet paper (Zweckform, no.
2576). Drying is performed with a hairdryer. The coated
paper is then satinised under 10 bar of pressure and at
50°C with the aid of a laboratory calender. The rate of
15   application of the coating slips S2-B that is obtained is
13 g/m².

The coated papers are printed with an internal test image
using an Epson Stylus Color 980 with the settings Premium
Glossy Photo Paper, 1440 dpi, bidirectional, Epson
20   calibration, gamma (D): 1.8.

The visual impression of gloss, adhesion and test image for
the ink-absorptive media produced is reproduced in Table 4.
The media according to the invention M2-A and M2-B display
good values for gloss, adhesion and test print. The ink-
25   absorptive media M0_2-A and M0_2-B produced from
dispersions D0_2 display good to satisfactory values for
gloss, adhesion and test print. In terms of the drying
performance of the coating slips, the media M2-A and M2-B
according to the invention are clearly superior to the
30   media M0_2-A and M0_2-B according to the prior art.

Table 1: Batch sizes for production of the dispersions

Ex.	Demin. water	Powder A		Powder B		Additive (#)	Solids
		Type	Qty	Type	Qty		
	g		g		g	g	wt.%
D0_1	1350	OX30	150			0	15
D0_2	1350			AE200	150	0	15
D1		OX30	150	AE200	225	0	25
D2	1010	OX30	150	AE200	300	40.3	30
D3	1012	OX10	150	AE200	300	38.4	30
D4	730	OX10	150	DOX110	600	20.3	50
D5	1067	OX30	75	AE300	300	57.6	25

(#) Additive: Polyquat 40U05NV from Katpol, Bitterfeld

Table 2: Physical-chemical values for the dispersions

Ex.	Av. aggregate size D_{50}	Av. BET surface area	Viscosity	Viscosity	pH	Zeta potential
	nm	m^2/g	$1/s^{-1}$	$100/s^{-1}$		mV
D0_1	50	30	n.d.	n.d.	4.8	n.d.
D0_2	245	200	n.d.	n.d.	4.3	n.d.
D1	298	132	2450	878	4.4	-3.5
D2	173	143	340	120	2.9	+36
D3	165	137	235	87	2.9	+37.5
D4	98	54	385	277	2.8	+34.2
D5	168	246	412	257	2.8	+38.2

n.d.   not determined

Table 3: Batch sizes and physical-chemical values for the coating slips

Coating slip	PVA content (1)	Solids content	pH	Viscosity (2)
	wt.%	wt.%		mPas
S0_2-A	36	13	4.7	724
S0_2-B	14	14	4.6	640
S2-A	22	18	3.4	554
S2-B	6	20	3.2	618

(1) Relative to 100 parts of solid in the dispersion

(2) Viscosity according to Brookfield at 100 rpm in mPas

5

Table 4: Visual impression of gloss, adhesion and test image [1] for the ink-absorptive media.

Ink-absorptive medium	Gloss	Coating slip adhesion	Test print	Coating slip drying performance
M0_2-A	+	0	+/0	−
M0_2-B	+/0	+/0	+/0	−
M2-A	+	+	+	+/0
M2-B	+/0	+	+	+

(1) Each test impression assessed by 3 independent people:
++: very good, +: good, +/0: good to satisfactory,
10 O: satisfactory; -: poor